

FLOATING PONTOONS

DESCRIPTION

Block:

Weight

Materials

UV protection

Colors

Floating capacity

Resistance

Maintenance

Connecting

Warranty

Recyclable

Temperature

Applications

MEASURES AND TECHNICAL DETAILS

50x50 cm x40 cm or (double) 100x50x40cm

4 modules (or 2 double) = 1 sq

About 6 kilos for each single module, 12 kilos for the double

HDPE high density Polietylene

Plastic resists against UV ray and every wether conditions

Blu, beige

350 kg per sq ,

Flexible system studied to be placed also into open sea. It resists until 2 meters waves condition.

Low. Wash with high pressure

Easy to connect. All the components are light and easy to move. In 1 hour 2 person can connect about 50 cubedocks.

3 years

100%

It resists from -55° to + 75°

For a lot of different uses. From docks for boat to floating platforms for fun, as solarium, a floating swimming pool in open sea, exc.....



How and when you can use CUBEDOCK system:

Cubedocks can be placed everywhere: in lake, river, and open sea, for Hotels, resorts, beach clubs, kayak clubs, diving center.....as:

- Floating platforms as solarium
- Floating diving platform
- Floating mooring pontoons
- Marinas
- Floating pontoons on rivers or lakes
- Sea-platforma for helicopters
- Floating restaurants
- Fish farms



Product code	Product Name	Floating Capacity (kg)	Width (cm)	Wide (cm)	High (cm)
S-01	SD-50*50 Floating CUBE Dock	100	50	50	40



All the items are made with a single mould . there are no joints or additional parts.

Dock with TEAK SURFACE




Floating pontoon starts from shore to open sea



Dock with faux Wood SURFACE "Listostar"

Floating Capacity: 350 kg/sq

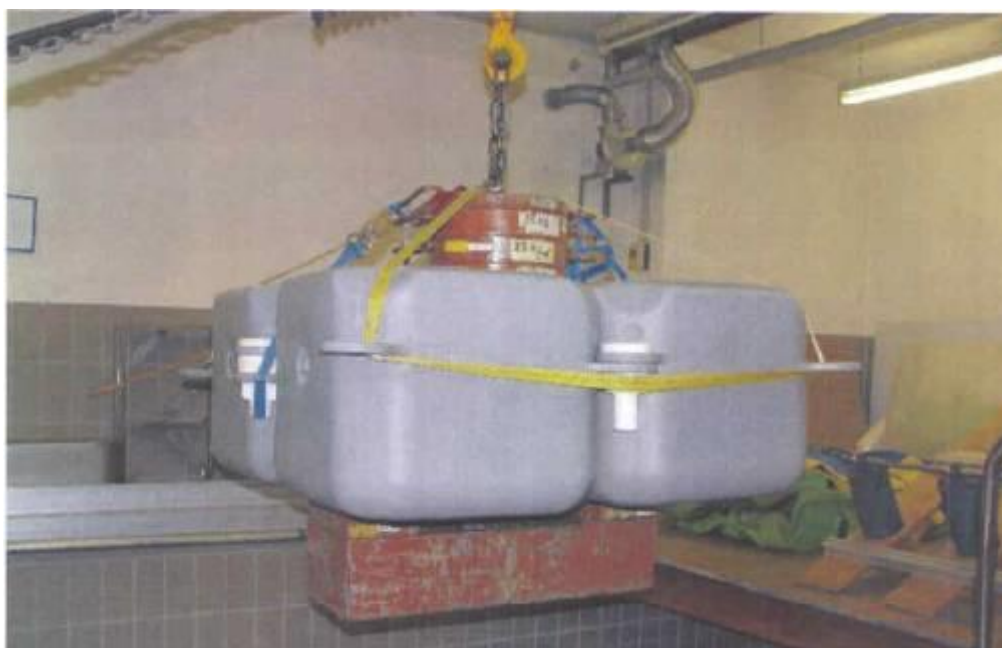

HOW TO CONNECT



PLACE 2 100X50X40CM MODULES OR 4 MODULES 50X50X40CM ALL ORIENTED IN THE SAME DIRECTION



INSERT THE PIN



PUSH PIN TO FUND



TURN IT 45°



CONNECT SIDE SCREWS ON EVERY SIDE. PE DISC MUST BE PLACED WHERE NEEDED.



IN ABOVE PICS YOU CAN SEE AN EXAMPLE WITH 4 DIFFERENT 50X50X40CM CUBEDOCK COLORED












MOORING SCHEME – WITH DEAD WEIGHTS

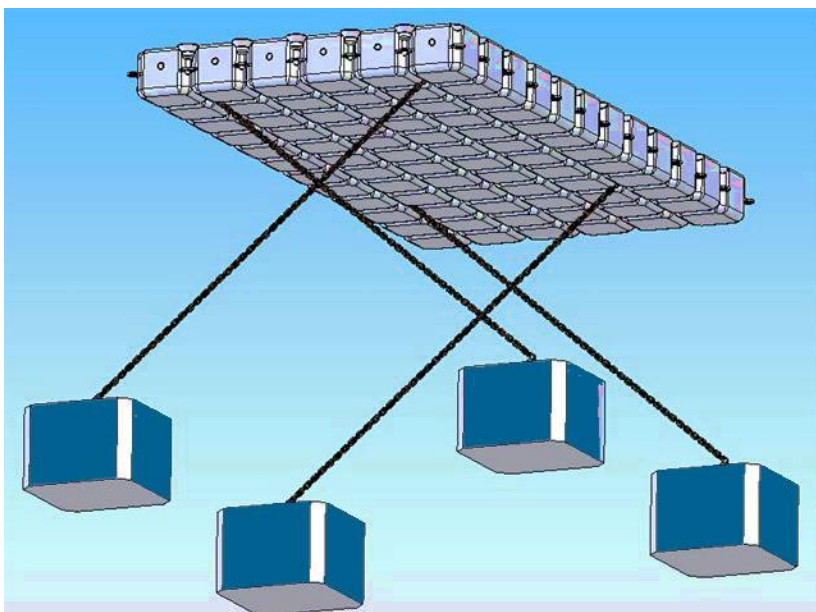

MOORING SCHEME – WITH POLES

